

CAMERA-READY LOGOTYPE FOR GAS-FIRED LISTING MARKS FOR CANADA AND THE U.S.

These Marks are registered by Underwriters Laboratories Inc.

GAS-FIRED



LISTED

GAS-FIRED



LISTED

GAS-FIRED



LISTED

GAS-FIRED



LISTED

GAS-FIRED



LISTED

GAS-FIRED



LISTED

GAS-FIRED



LISTED

GAS-FIRED



LISTED

GAS-FIRED



LISTED

The minimum height of the registered trademark symbol ® shall be 3/64 of an inch. When the overall diameter of the UL Mark is less than 3/8 of an inch, the trademark symbol may be omitted if it is not legible to the naked eye.

GAS-FIRED



LISTED

GAS-FIRED




LISTED

GAS-FIRED



LISTED

RELATIVE DESIGN & PROPORTIONS FOR GAS-FIRED LISTING MARKS FOR CANADA AND THE U.S.

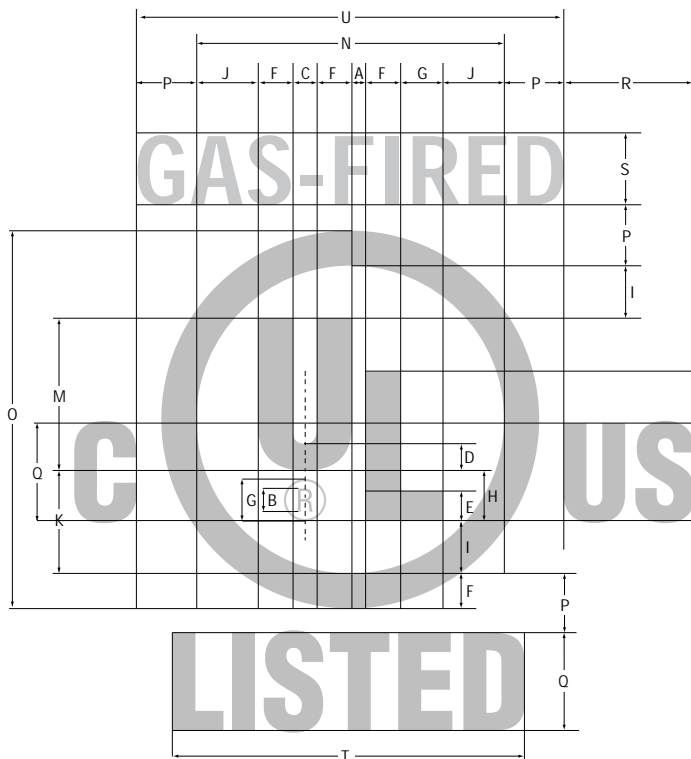

KEY TO DIMENSIONS

UL Mark

A	8 units	I	30 units
B	13 units	J	35 units
C	14 units	K	59 units
D	15 units	L	85 units
E	17 units	M	87 units
F	20 units	N	176 units
G	24 units	O	216 units
H	29 units		

"C" and "US"

P	34 units
Q	56 units
R	75 units

"Listed" and "Gas-Fired"

Q	56 units
S	42 units
T	201 units
U	245 units

Please note:

Not all of these elements should be used together with the same UL Mark. When products are certified to standards other than UL standards, the number and issue year must be noted near the UL gas-fired Mark as well as any other markings required by the standard. This information will be set in Helvetica Condensed Bold.

The font for all letter forms in the gas-fired Mark itself is Helvetica Condensed Black, except for the trademark symbol ®, which is Helvetica Condensed Medium. No other fonts are acceptable.

